

03-24-00

PATENT
Docket No. PD-200049

CUSTOMER NO.: 020991

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE
APPLICATION TRANSMITTAL LETTER FOR
NONPROVISIONAL PATENT APPLICATION
Under 37 C.F.R. 1.53(b)

Certification under 37 CFR 1.10 (if applicable)

EF740978743US

EXPRESS MAIL mailing number

May 22, 2000

Date of Deposit

I hereby certify that this application is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231.

VICKIE CHUPP

(Type or printed name of person mailing application)

(Signature of person mailing application)

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application, including 6 sheet(s) of formal drawings, of inventor(s):

Kar W. Yung, Frank A. Hagen, Donald C. D. Chang

For: A MULTI-PLATFORM WIRELESS COMMUNICATION SYSTEM FOR A VARIETY OF DIFFERENT USER TYPES

The filing fee for this application is calculated below:

	NUMBER		CLAIMS AS FILED		RATE	
	FILED		EXTRA			
Basic Fee						\$ 690.00
Total Claims	22	-20 =	2	x	\$ 18.00	\$ 36.00
Claims	3	- 3 =	0	x	\$ 78.00	\$ -0-
Multiple Dependent Claims				+	\$260.00	\$
TOTAL FILING FEE :						\$ 726.00

Please charge Deposit Account No. 50-0383 of Hughes Electronics Corporation, El Segundo, California, in the amount of **\$726.00**. The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment, to that account.

The Commissioner is further hereby authorized to charge to said above Deposit Account No. 50-0383, pursuant to 37 CFR 1.25(b), any fees whatsoever which may properly become due or payable, as set forth in 37 CFR 1.16 to 1.17 inclusive, for the entire pendency of this application without specific additional authorization.

Please associate this application with the Hughes Electronics Corporation Customer Number 020991.

This form is submitted in triplicate.

HUGHES ELECTRONICS CORPORATION

MICHAEL W. SALES, Registration No.: 30,213
Attorney for Applicant(s)CUSTOMER NUMBER 020991
HUGHES ELECTRONICS CORPORATION
Patent Docket Administration
Bldg. 001, M/S A109
PO Box 956
El Segundo, CA 90245-0956
Telephone: (310) 662-9916
Date: May 22, 2000

PD 200049

A MULTI-PLATFORM WIRELESS COMMUNICATION SYSTEM
FOR A VARIETY OF DIFFERENT USER TYPES

Kar Yung
Frank A. Hagen
Donald C. D. Chang

Cross-Reference To Related Applications

The present application is a continuation-in-part of assignee's co-pending U.S. Serial No. 5 09/271,997, entitled "Multiple Satellite Mobile Communications Method and Apparatus for Hand-Held Terminals," filed on March 18, 1999.

Technical Field

10 The present invention relates generally to a wireless communication system. More specifically, the present invention relates to a multi-transponder wireless communication system which achieves better utilization of the total system resources by allowing for flexible combinations of user types.

Background Art

15 Current mobile satellite communication systems, such as Iridium, Globalstar, and ICO, utilize low-cost user terminals as one of their key system features. To maintain communications linkage 20 with these current mobile systems, the system satellites provide multiple beam and high-gain services to the subscribers. The low-cost and low-gain hand-held terminals utilized by the users of these systems, transmit and receive signals to and 25 from high performance satellites which populate almost the entire hemisphere. Some of these current

systems require access to at least two satellites to assure a soft hand-over process as the satellites progress from horizon to horizon. As a result, the satellite system becomes more reliable and available
5 as more satellites come into a user's field of view (FOV). The satellite constellations provided by these current systems are thus sized to guarantee a minimum number of satellites within a user's FOV over large coverage areas at all times.

10 All of these current mobile satellite communication systems, however, suffer from certain disadvantages. First, they all have limited frequency (the term "frequency" is generalized herein to refer to frequency, time slot or CDMA code)
15 resources. Any given frequency over a given ground position can only be utilized by one user at a time. Thus, if one user accesses a satellite using a particular frequency slot to communicate to his counterpart on network, other satellites and/or users
20 in the same region cannot reuse the same frequency resource in the same local area. In particular, if a nearby secondary user has a handset that requires the same frequency resources as is being utilized by the first user, the second user is unable to access the
25 system, even via different satellites. This is true regardless of the sophistication of the system, including systems that utilize multiple beam satellite designs. Even when multiple satellites are available at a given geographic location, the same

frequency spectrum cannot be used by more than one user in a local area. The availability of multiple satellites merely serves to increase the availability of the system to the user. However, the total
5 capacity of these mobile communication satellite systems is still limited by their inefficient usage of the available frequency resources. Thus, the potential growth of these current satellite communication systems is inherently limited.

10 Additionally, current telecommunications systems generally allow only mobile-to-hub and hub-to-mobile communications in most low earth orbit and medium earth orbit mobile satellite constellations. Mobile-to-mobile linkages require multiple hops
15 between hubs. This means that two or more frequency resources must be committed by the system to close the links.

 It is clearly desirable to provide a mobile
20 communication satellite system that relaxes the above constraints, and more efficiently utilizes current mobile satellite communication system resources, while also providing much greater opportunity for system growth.

25 **Summary of the Invention**

 It is an object of the present invention to provide a wireless communication system with reduced

limitations on frequency re-use for point-to-point communications.

It is another object of the present invention to provide a wireless communication system
5 that utilizes individual transponders and mobile terminals that are relatively simple and of low complexity.

It is a further object of the present invention to provide a wireless communication system
10 with high system reliability through graceful degradation.

It is still another object of the present invention to provide a multi-transponder wireless communication system that allows flexible combination
15 of user types.

It is a related object of the present invention to provide a multi-transponder wireless communication system with better utilization of total
20 system resources.

In accordance with the above and other objects of the present invention, a multi-transponder wireless communication system is provided. The wireless communication system includes a plurality of
25 individual communication transponding nodes. The plurality of individual transponding nodes are each

in communication with a ground hub such that a signal processed by the ground hub in the forward link is radiated with compensating time delays to one or more of the plurality of individual transponders. The
5 radiated signals are then re-radiated by the plurality of individual transponders and coherently received and processed by a mobile user terminal. The return link signal path is the reverse of the forward link.

10

In accordance with another object of the present invention, the system includes a first mobile terminal having an assigned code space. The first mobile terminal receives the re-radiated signal from
15 one or more of the plurality of individual transponders. The system also includes a second mobile terminal having an assigned code space that is different than that of the first mobile terminal. The second mobile terminal also receives the re-
20 radiated signal from one or more of the plurality of individual transponders. The system also includes a third mobile terminal that has an assigned code space that overlaps the assigned code spaces of either or both of the first and second mobile terminal in whole
25 or in part. The third mobile terminal receives the re-radiated signal from one or more of the plurality of individual transponders, whereby the one or more transponders from which the third mobile terminal receives the signal are different than the one or
30 more individual transponders that communicate with

either the first or second mobile terminal having the same or overlapping code space as the third mobile terminal.

These and other features of the present
5 invention will become apparent from the following description of the invention, when viewed in accordance with the accompanying drawings and appended claims.

Brief Description of the Drawings

10 **FIGURE 1** is a schematic illustration of the forward link geometry of a mobile satellite communications system in accordance with the present invention;

FIGURE 2 is a schematic block diagram
15 illustrating the signal transmission function of a ground telecommunications hub for a wireless communications system in accordance with a preferred embodiment of the present invention;

FIGURE 3 is a schematic illustration of the
20 return link geometry of a wireless communications system in accordance with a preferred embodiment of the present invention;

FIGURE 4 is a schematic block diagram illustrating the signal receive function of a ground

telecommunications hub for a wireless communications system in accordance with a preferred embodiment of the present invention;

FIGURE 5 is a schematic flow diagram illustrating the overall architecture for a wireless communications system in accordance with a preferred embodiment of the present invention; and

FIGURE 6 is a schematic illustration of a multi-transponder wireless communication system illustrating signals being received coherently by their intended remote user;

FIGURE 7 is a schematic illustration of the multi-transponder wireless communication system of Figure 6 illustrating the same signals being received incoherently by a remote non-intended user;

FIGURE 8 is a schematic illustration of a conventional approach to an asynchronous CDMA system that may be utilized in accordance with the present invention;

FIGURE 9 illustrates a preferred embodiment of the present invention applied to the asynchronous CDMA system of Figure 8;

FIGURE 10 is a schematic diagram illustrating the reception of matched filtered

signals arriving from multiple transponder nodes in accordance with the preferred CDMA system of Figure 9;

5 **FIGURE 11** is a schematic diagram illustrating an exemplary distribution of users in code space for a single platform system;

10 **FIGURE 12** is a schematic diagram illustrating an exemplary distribution of users in platform-code space for a multiple platform system; and

15 **FIGURE 13** is a schematic diagram illustrating an alternative exemplary distribution of users in platform-code space for multiple platform system.

Best Mode(s) for Carrying Out the Invention

20 Referring now to the figures, the disclosed mobile communication system can be utilized to break away from the frequency spectrum limitation discussed above and provide much more efficient means to re-use the allocated mobile satellite and wireless spectrum multiple times. By eliminating this frequency
25 spectrum limitation on the operation of multiple satellites, the overall capacity of existing mobile satellite and wireless communication systems can more readily expand.

Referring now to Figure 1, a mobile satellite communication system 10 in accordance with a preferred embodiment of the present invention is illustrated. In Figure 1, the mobile satellite communications system 10 is illustrated in a forward link mode. The mobile satellite communications system 10 includes a ground telecommunications hub 12, a satellite constellation 14 including a plurality of individual satellites 16, and a plurality of hand-held user terminals 18 such as mobile phones. As discussed in more detail below, the user terminals 18 can receive signals 20 simultaneously from multiple satellites 16 via their broad beam antennas 22. The ground telecommunications hub 12 is in communication with all of the satellites 16 in the satellite constellation 14 individually and simultaneously. The hub 12 also pre-processes user signals to compensate for path differentials before sending radiated signals 24 to the satellites 16, as discussed in more detail below.

In accordance with the preferred embodiment, the design of the individual satellites 14 can be significantly simplified over those utilized in prior mobile systems because the satellite constellation 14 functions as a sparse radiating array. It is known that the more satellites 16 that are included in a satellite

constellation 14, the better the performance the mobile satellite communications system 10 will achieve. Satellites that are simple, small, and provide high performance are preferable. This is
5 because the performance of the system 10 depends more heavily on the satellite constellation 14 than on the individual satellites 16.

In a transmit mode, shown in Figure 1, the individual satellites 16 radiate modulated RF power
10 to a chosen field of view ("FOV"). The system 10 is still operable with reduced capacity and no reconfiguration even if one individual satellite 16 is lost for any reason. As a result, the system 10 features graceful degradation characteristics and
15 provides very high reliability and availability. Most of the complexity of the system 10 is located in the ground hubs 12, which locate and track the potential users and perform the major functions of beamforming and filtering, as discussed below.

20 As shown in Figure 2, the processing performed at the ground telecommunications hub 12 is diagrammatically illustrated. The hub 12 tracks, updates, and forward predicts the time variant differential information among various paths between
25 the hub 12 and the intended user terminals 18. The accuracy of this information must be within a tenth of an RF wavelength. For UHF satellite systems, the required path differential accuracy is preferably

about ten (10) centimeters. For L and S band mobile satellite constellations, the accuracy must be on the order of one (1) centimeter. Unfortunately, the conventional or GPS techniques are not able to
5 provide the required accuracy.

In accordance with the present invention, the required accuracy of the equivalent path differentials, including all propagation distortion, can be provided using two-way active calibration and
10 R2N (two-way ranging navigation) techniques. An R2N technique is just one technique for obtaining positioning information by which to locate the positioning of the satellites and users precisely using multiple calibration sites and is described in
15 co-pending U.S. Patent Application Serial No. 09/209,062, entitled "Method and System for Determining a Position of a Transceiver Unit Incorporating Two-Way Ranging Navigation as a Calibration Reference for GPS," and filed on December
20 10, 1998. Other known techniques may also be utilized.

The ground telecommunications hub 12 has a processing center 26 that processes each signal and is shown in a transmit mode in Figure 2. The hub 12
25 has the capability to address the plurality of satellites 16 individually through the use of antenna spatial discrimination to provide separate signals to different satellites. Alternatively, code

identification can also be used to address different satellites independently.

As shown in Figure 2, assuming that there are "H" users, the signals from user 1 to user H, 5 identified generally by reference number 28, are input into the processing center 26. The position of the various users (1 to H), are determined generally by the circuitry from the various user signals 28, designated by reference number 30. The various user 10 signals 28 for user 1 to user H are then combined for transmission to the different satellites 16, as generally indicated by reference number 32. In this case, the signal is sent to N satellites. The combined signals are then amplified, filtered, up 15 converted, and then further amplified, as generally indicated by reference number 36. These signals are then delivered to a multiple beam antenna 38 where beam-forming processing is done so that the signals can be transmitted to the N satellites via radiating 20 signals 24. The beam-forming process can be done in baseband or a low IF frequency band by either digital or analog means. For a low bandwidth (less than a few MHz signals), digital implementation can provide cost advantages. The processed signal 24, radiated 25 from the ground hub 12 to each satellite, is amplified, filtered, and then re-radiated by each of the multiple satellites 16 to arrive at a designated user location simultaneously. Consequently, the radiated signals from the multiple satellites will be

received coherently by a simple hand held terminal
22.

Equivalently, the effect of the spatial
processing performed by the processing center 26 is
5 to focus signal strength on the user from multiple
satellites 16, which act like sparsely separated
portions of a large active reflector. Therefore, the
processing on the ground will insert different time
delays into the signals 24 which are radiated via
10 various paths. The time delays will be inserted into
the signals 24 as if the satellites were located on
an ellipsoidal surface, of which the two foci are
located exactly at the hub 12 and the designated user
18 positions respectively. In low and middle earth
15 orbit constellations, the users 18 and the hub 12
will always be in the near field of the sparse array.

In a receive mode, shown in Figure 3, the
individual satellites 16 collect RF signals from the
same FOV. Figure 3 illustrates the return link
20 geometry for receiving signals sent from the user
terminals 18 to the ground telecommunications hub 12.
As shown in Figure 3, there are two groups of links
involved: the links between users 18 and the
satellites 16, generally indicated by reference
25 number 40, and those between the satellites 16 and
the hub 12, as generally indicated by reference
number 42. For best performance, the user antennas
22 preferably are able to illuminate all the

satellites 16 involved. This will lead to a constraint on the variation of the gain of the user antenna 22 over the cluster.

As with the forward link geometry, the
5 satellites 16 will amplify the signals 40 received from the users 18 and re-radiate the signals 42 toward the hub 12. The hub 12 can receive signals 42 independently, but simultaneously from the satellites 16, and will add the signals 42 from different
10 satellites coherently in the post-processor 44 as illustrated in Figure 4.

The signal flows on the block diagram shown in Figure 4 illustrate the receive function of the post-processor 40 and the hub 12. The signal flows
15 are reversed from the corresponding ones in Figure 2. Therefore the receive process will not be reiterated in detail. However, the links 42 from the satellites 16 to the hub 12 are received at the beamformer 38 and then transferred to the receiver and down
20 converters 46 before the signals are separated. The signals are separated depending upon the user from which they are received, as generally indicated by reference number 48, and then sent to the specific user 1 through H, as generally indicated by reference
25 number 50. It should be understood that both the receive and transmit function are a necessary part of the pathlink calibration and user positioning.

The technique of the present invention has been demonstrated to significantly reduce the average side lobe levels. It has been determined that this is due to three factors. First, the proposed
5 architecture is not a periodic array, but rather a randomly spaced sparse array, which has no grating lobes. Although the average side lobe level at a single frequency is relatively high, the level decreases with increasing bandwidth. Second, the
10 large sparsely filled array formed by moving satellites is a large extended aperture size. Thus, all of the users on the ground are in the near field of the extended aperture and the wave fronts received by all users are spherical instead of planar.
15 Consequently, dispersion effects become much more pronounced than would be the case in the far field. The dispersion grows very fast as a probe is scanned away from the main beam and the dispersion smears the power distribution very effectively over a finite
20 signal bandwidth. Third, the communication system is preferably designed with a large frequency bandwidth spectrum. The information signal will therefore be spread over this bandwidth via CDMA or through short duration waveforms for TDMA schemes.

25 Figure 5 illustrates diagrammatically the operation of the invention, which allows for the increased re-use of precious frequency spectrum by multiple satellites. The advantages provided by this system include no limitation on frequency re-use by

additional satellites for point-to-point communications. Rather, the capacity of this system is only limited by total satellite RF power. Further, the preferred embodiment allows for the use
5 of simple and low cost satellite designs, because the more satellites included in the constellation, the better the performance of the overall system. The system also provides high system reliability through graceful degradation, as well as concentrating
10 complex processing at the hubs.

The preferred embodiment creates demand for a large number of low cost satellites and also uses R2N techniques to perform satellite and user positioning. The more users using this system, the
15 more accurately the satellite and user positions can be determined. However, even more important than the actual positions of the users and satellites are the path lengths traversed by the signals. Therefore, periodic calibration techniques applied directly to
20 those path lengths may be much simpler and more cost effective. Further, the system also benefits from large percentage bandwidths available with CDMA and TDMA systems.

As shown in Figure 5, the present invention
25 is divided up into three segments: a hub segment 52 containing the ground telecommunications hub 12, a space segment 54 containing a plurality of individual satellites 16, and a user segment 56, having a

plurality of user terminals 18. The hub segment also has a processing center 26 and a post-processor 44 for processing the received and transmitted signals.

5 The user terminals 18 receive and transmit signals simultaneously from/to multiple satellites 16 via their broad beam antennas. The user terminals 18 do not require any capability to separately address the individual satellites 16 of the space segment 54.

10 The hub 12 maintains links with each of the satellites 16 in the space segment 54 individually and simultaneously. The hub 12 pre-processes the signals intended for each remote user on transmission and post-processes the signals supplied to each local

15 user on reception to compensate for path differentials. These corrections are separately computed and applied to the signals transmitted to or received from each satellite 16 of the space segment 54 for each user.

20 Figure 6 illustrates a multi-platform communication system 100 with improved frequency reuse efficiency in accordance with a preferred embodiment of the present invention. In particular, the system illustrated in Figure 6 uses CDMA coding

25 to subdivide the frequency resource among the various users. The system 100 enables a plurality of transponders 102, 104 to receive signals 106, 108 from the ground hub 110 and to transmit the signals 112, 114 at the same frequency with reduced

interference to the intended user 116 from signals intended for other users. This is achieved by synchronizing the transmitted signals at the hub in such a way that the intended user 116 will receive
5 all of the signals 112, 114 synchronously and completely in phase.

Based on the distances from the hub 110, to the various transponders 102, 104 and the distances
10 between the transponders 102, 104 and the intended user 116, the appropriate compensating time delays are calculated and injected into each forward link message at the hub such that the intended user will coherently receive a combined signal from all the
15 transponders as generally indicated at 118. The forward link to the intended user 116 follows the sequence of the hub 110 to the first transponder 102 to the user 116 (hub → trans 1 → user 1) and also from the hub 110 to the second transponder 104 to the
20 user 116 (hub → trans 2 → user 1). Using the correct time delay on each forward link, all intended signals 112, 114 will arrive at the intended user 116 in phase. Conversely, the same signals intended for the intended user 116 will arrive out of phase at a
25 non-intended user 120 and all other non-intended users in the area. This is shown in Figure 7, which is described below.

Figure 7, illustrates the operation of the system of Figure 6 with respect to the non-intended user 120. The distance between the hub 116 and the first transponder 102 and the distance between the first transponder 102 and the non-intended user 120 (hub → trans 1 → user 2) and the distance between the hub 116 and the second transponder 104 and the distance between the second transponder 104 and the non-intended user 120 (hub → trans 2 → user 2) are different in this case. Because of the distance differences, the signals 122, 124 will arrive at the non-intended user 120 at a different times and out-of-phase. The combined signal 126 will thus appear as noise and can be rejected as such by the terminal of the non-intended user 120.

It should be understood that the transponders 102, 104 can be part of any type of wireless communication system or can even be selected from several such systems. For example, while a space based system using satellites is illustrated, regional and national tower-based cellular networks for fixed and mobile communications may also be utilized. Additionally, any high altitude platform system, such as manned/unmanned airships, balloons, or airplanes may also be utilized. Further, while only two transponders are illustrated, an unlimited number of transponders may be utilized. Moreover, while the multiple transponders are shown as being

part of a unitary system, any combination of transponders can be used to transmit signals in accordance with the present invention. For example, a signal may be transmitted to a user through both a space-based system and a high altitude platform system. Finally, different sets of transponders may be used to communicate with different users. These various sets may overlap in whole, in part or not at all.

10 As is known, in conventional CDMA single transponder systems, unique CDMA codes are assigned to each user to avoid interference. Similarly, in multi-transponder systems, when two or more transponders are serving the same geographical location, unique CDMA codes must be used to distinguish the various signals and to avoid interference. For example, as shown in Figure 8, which illustrates a conventional CDMA multi-transponder system, user 116 must use different codes for signals 112, 114 received from the two different transponders 102, 104. Thus, two distinct codes, "code 1" and "code 3" are assigned to the same user 116 in this example, with "code 1" being assigned to signal 112 and "code 3" being assigned to signal 114. If both transponders 102, 104 were to transmit at "code 1", the two received signals 112, 114 would interfere with each other and the terminal of the user 116 would not be able to decode the signals correctly. Two additional codes must be assigned to

each additional user, such as user 128 who is assigned codes 2 and 4.

The various CDMA codes for co-located users
5 can be synchronous or asynchronous. A synchronous
orthogonal code gives an advantage of about 15 dB or
better over asynchronous CDMA codes. For multiple
platforms, it is hard to synchronize CDMA codes among
users. Thus, for the disclosed multi-platform
10 system, asynchronous CDMA communication is assumed.
Although multiple transponder nodes increase the
system availability and total power resource, it
under-utilizes the system's full potential, because
there are only a finite number of codes available due
15 to the finite bandwidth available to a system. Thus,
the total bandwidth limits the number of users the
system can serve and the system is unable to fully
utilize the power and capacity it was designed to
handle.

20

In the preferred embodiment, the system 100
is an asynchronous CDMA system that utilizes imbedded
time delays as described in co-pending patent
application Serial No. _____, filed
25 _____ and entitled "Coherent Synchronization
of Code Division Multiple Access Signals," which is
hereby incorporated by reference. In accordance with
the preferred system, the signals 112, 114 from each
transponder 102, 104 will arrive completely in-phase
30 because appropriate time delays are pre-determined

and applied to the signals 112, 114 at the central hub 100, as is shown in Figure 9. It should be understood that other time delay methods can also be utilized.

5

As shown, the first user 116 receives signals 112 from each of the transponders 102, 104 using the same code ("code 1"). Similarly, the second user 128 receives signals 114 from each of the transponders 102, 104 using the same code ("code 2"). The central hub 110 determines the time delay between the users and the hub for signals transmitted or received via each transponder and inserts appropriate delays to equalize the total delay via each transponder. Thus, the intended signals from different transponders will all arrive at the intended user in-phase, while non-intended signals will arrive out of phase.

20

Figure 10 illustrates the summation or matched-filtering of signals at a user's terminal in accordance with the present invention. The CDMA matched-filtering of the total signal received from all the transponders at the terminal produces greater signal strength when there are multiple satellites. As discussed above, CDMA signals that are not intended for the user will appear as noise and can be suppressed. Thus, the same CDMA code can be reused under certain restrictions.

30

Referring to Figure 10, reference number 130 generally indicates three incoming sequences of information that are arriving in-phase. Each of the signals in this example has a code length of six and
5 the signals are match-filtered to form a signal which is generally represented by 132 and the signal strength out of the unmatched filter is determined according to the equation

$$S \approx n_c^2 n_t^2$$

10

The reference number 134 generally indicates three incoming sequences that are arriving out-of-phase. In this example, each of the signals has a code length of six; the signals are match-
15 filtered and appear as noise as generally represented by 136. The interference or noise power is expressed according to the equation

$$N_I \approx n_c n_t$$

It has been determined that the signal-to-
20 noise ratio for a typical user is governed by the following equation:

$$\left(\frac{S}{N_I} \right)_{CT} \approx \frac{n_c n_t}{n_u - 1} \quad \text{Equation 1}$$

where S = Signal Power;
N_I = Interference Noise Power;
25 n_c = CDMA Code Length;
n_t = No. of Transponders; and
n_u = No. of Total Users.

It has further been determined that as long
30 as the users are sufficiently far separated, the same

CDMA code can be re-used without significantly degrading the signal-to-noise ratio. The system capacity of the disclosed system is thus proportional to n_c and n_t .

5

In order to describe the operation of the disclosed concept, an exemplary multi-platform system is disclosed. The exemplary multi-platform system consists of four platforms (P1, P2, P3, P4) and four
10 code choices (C1, C2, C3, C4). In Figure 11, assuming a given power capacity for each platform and the total code space needed to support one user A if there is only one platform P1, the distribution of users in code space is illustrated.

15

Refer now to Figure 12, which is another exemplary multi-platform system consisting of four platforms (P1, P2, P3, P4) and four code choices (C1, C2, C3, C4). This system illustrates four similar
20 users (A, B, C, D) who may be located at the same location. The CDMA concept described above allows the signals from the various platforms to be combined coherently for each user, and also allows the users to be distributed in a two-dimensional space. The
25 net effect of this example is that the total communication capacity is n_t times larger. As shown, the platform space behaves like code space as indicated by Equation (1) above. Further, the total system capacity can be utilized when all platforms
30 are used for all users.

In accordance with a preferred embodiment of the present invention, the platform space is treated as a new resource dimension. As shown in Figure 13, the preferred system allows individual users to use less than the total number of platforms or transponders in a given system. Thus, for the exemplary system shown, the platform space includes four platforms (P1, P2, P3, P4) and the code space includes four distinct codes (C1, C2, C3, C4). It should be understood that any number of platforms and codes can be utilized. With prior disclosed configurations, a user assigned a particular code would utilize all platforms to close the forward and return links. This resulted in the full system capacity being utilized.

As shown in Figure 13, which is merely an exemplary figure for illustration purposes only, the disclosed system is not limited by either the size of the platform space or the size of the code space alone. The system can support users (A, B, C, D, E, F) all being of different types, i.e., having different bandwidth capabilities or other characteristics. Thus, users A and F utilize all of the platforms across a given code space. User B only utilizes one code across two platforms. This configuration allows users C, D and E to each utilize the same or overlapping code space as user B with different platforms.

The platform-code space diagram shown in Figure 13 includes a plurality of individual cells. With each individual cell being associated with a particular code space and a particular platform space. The number of cells, shown in Figure 13 is equal to the number of platforms multiplied by the number of codes. Thus, in Figure 13, sixteen individual cells exist, with the first cell being located in the diagram at the coordinate position identified by (P_1, C_1) and the last cell being located in the diagram at the coordinate position identified by (P_4, C_4) . The identification of the other cells will be known and understood by those of skill in the art. In this configuration, no individual cell can be utilized by more than one user at any given time.

It can be seen that the operation of the disclosed system allows a variety of user types to utilize the system at any given time (different data rates and antenna gains). Each utilizes a flexible number of platforms and codes. It is possible that the system capacity may not be fully utilized in comparison with prior embodiments. However, such flexibility improves the system response to actual market demands. For example, a more powerful user terminal may not need all of the platforms to achieve the desired quality of service.

Having now fully described the invention,
it will be apparent to one of ordinary skill in the
art that many changes and modifications can be made
thereto without departing from the spirit or scope of
5 the invention as set forth herein.

In The Claims:

1 1. A mobile wireless communication system
2 for a variety of different mobile user types,
3 comprising:

4 a plurality of individual transponding
5 nodes;

6 a plurality of individual resource cells
7 each associated with a particular one of said
8 plurality of transponding nodes and one of a
9 plurality of available CDMA codes; and

10 a plurality of mobile terminals, each of
11 which is assigned to operate in one or more of said
12 plurality of individual resource cells;

13 wherein each of said plurality of
14 individual resource cells is assigned to at most one
15 of said plurality of mobile terminals at any one
16 time.

1 2. The system of claim 1, further
2 comprising:

3 a central processing hub, which establishes
4 links to one or more of said users through one or
5 more of said plurality of transponding nodes wherein
6 the specific transponding node and codes used to
7 complete each of said links is determined by the
8 resource cells assigned to the user;

9 wherein said central processing hub pre-
10 processes signals for forward link transmission such

11 that they are radiated with compensating time delays
12 to an intended one of said plurality of mobile users
13 who coherently receives all such signals intended for
14 him;

15 wherein said central processing hub post-
16 processes received signals to introduce compensating
17 time delays such that all such signals received from
18 a particular remote user may be coherently processed
19 together.

1 3. The system of claim 1, wherein each of
2 said plurality of individual transponding nodes is
3 independently selected from one of the following
4 system types: a space-based system, a high altitude
5 platform system, a tower based cellular network, or a
6 manned/unmanned aircraft.

1 4. The system of claim 2, wherein at
2 least one said plurality of mobile terminals is
3 assigned resource cells in platform-code space for
4 said return link that are different from said
5 resource cells in platform-code space assigned for
6 said forward link.

1 5. The system of claim 3, wherein said
2 high altitude platform system is comprised of a
3 plurality of manned/unmanned airships.

1 6. The system of claim 3, wherein said
2 high altitude platform system is comprised of a
3 plurality of high altitude balloons.

1 7. The system of claim 3, wherein said
2 plurality of individual transponder nodes are all of
3 the same type.

1 8. The system of claim 3, wherein said
2 plurality of individual transponder nodes are not all
3 of the same type.

1 9. A method for establishing a plurality
2 of communication links to a plurality of different
3 users, comprising:

4 providing a plurality of individual
5 transponding nodes;

6 processing a plurality of local user
7 signals at a ground hub to compensate for
8 differential propagation delays to any one of a
9 plurality of remote users;

10 assigning each of said plurality of remote
11 users one or more resource cells in platform-code
12 space;

13 wherein said resource cells assigned to a
14 user for use on the forward link may or not be the
15 same as those assigned for use on the return link;

16 wherein each resource cell assigned to a
17 particular user enables him to transmit signals to or
18 from the hub through a particular transponder node
19 using a particular CDMA code.

1 10. The method of claim 9, wherein at
2 least one of said plurality of transponder nodes is
3 selected from a high altitude platform system.

1 11. The method of claim 10, wherein said
2 high altitude platform system includes a plurality of
3 manned/unmanned airships.

1 12. The method of claim 10, wherein said
2 high altitude platform system is comprised of a
3 plurality of high altitude balloons.

1 13. The method of claim 9, wherein at
2 least one of said plurality of transponder nodes is
3 selected from a tower based cellular network.

1 14. The method of claim 10, wherein at
2 least one of said plurality of transponder nodes is
3 selected from a space based system.

1 15. A mobile wireless communication system
2 for a variety of different mobile user types,
3 comprising:

4 a plurality of individual transponder
5 nodes, each having an established link with a ground
6 hub;

7 a plurality of individual resource cells
8 each associated with one of said plurality of
9 transponder nodes and one of a plurality of codes;
10 and

11 a plurality of remote users having an
12 established link with said ground hub, and each being
13 assigned one or more of said plurality of individual
14 resource cells in code-platform space.

1 16. The system of claim 15, wherein each
2 of said plurality of individual transponder nodes is
3 selected from among the following platforms: a
4 space-based system, a tower-based cellular network, a
5 manned/unmanned aircraft or a high altitude platform
6 system.

1 17. The system of claim 16, wherein said
2 high altitude platform system is comprised of a
3 plurality of manned/unmanned airships.

1 18. The system of claim 16, wherein said
2 high altitude platform system is comprised of a
3 plurality of high altitude balloons.

1 19. The system of claim 16, wherein said
2 plurality of individual transponder nodes are
3 selected from the same platform.

1 20. The system of claim 16, wherein said
2 plurality of individual transponder nodes are
3 selected from at least two of the platforms.

1 21. The system of claim 16, wherein said
2 ground hub pre-processes signals for forward link
3 transmission and post-processes signals for return
4 link reception.

1 22. The system of claim 21, wherein at
2 least one of said plurality of mobile terminals is
3 assigned resource cells in platform-code space for
4 said return link that are different from those
5 assigned for said forward link.

Abstract

A mobile wireless communications system including a plurality of individual transponding nodes of various types, all in communication with a central processing hub. A local user signal is
5 processed by the central processing hub and radiated through multiple paths to a plurality of the plurality of individual transponding platforms simultaneously. The signal is then re-radiated by each of the plurality of the plurality of individual
10 transponding platforms to a mobile terminal that receives the re-radiated signal from the plurality of the plurality of individual transponding platforms coherently and in phase. The number of transponders and codes used to transmit each user signal can be
15 readily adapted to user requirements.

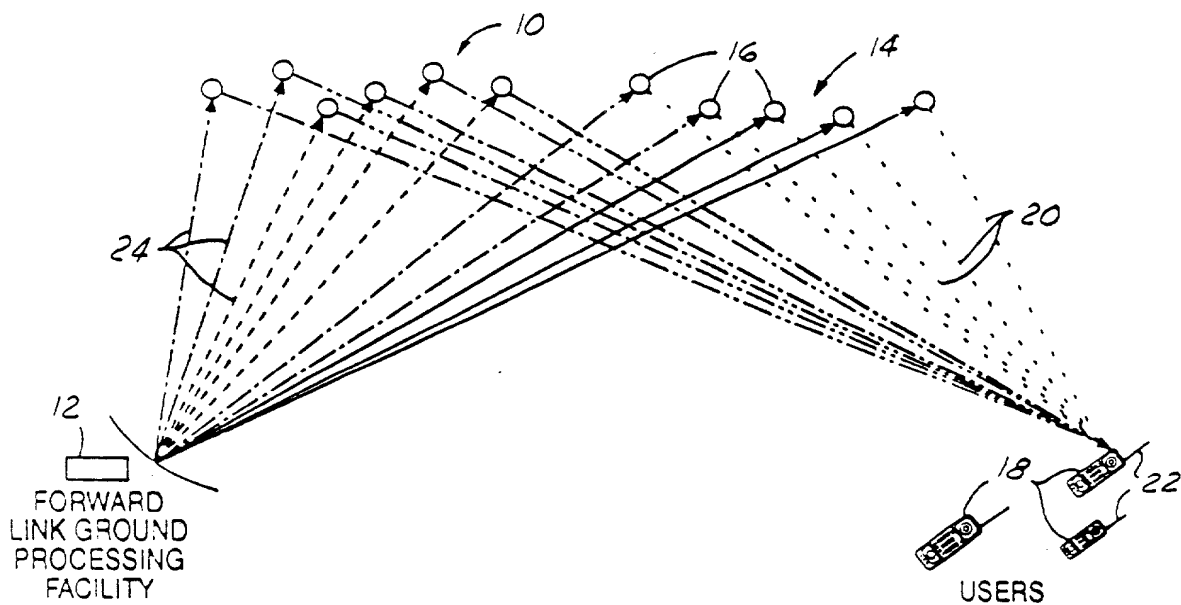


FIG. 1

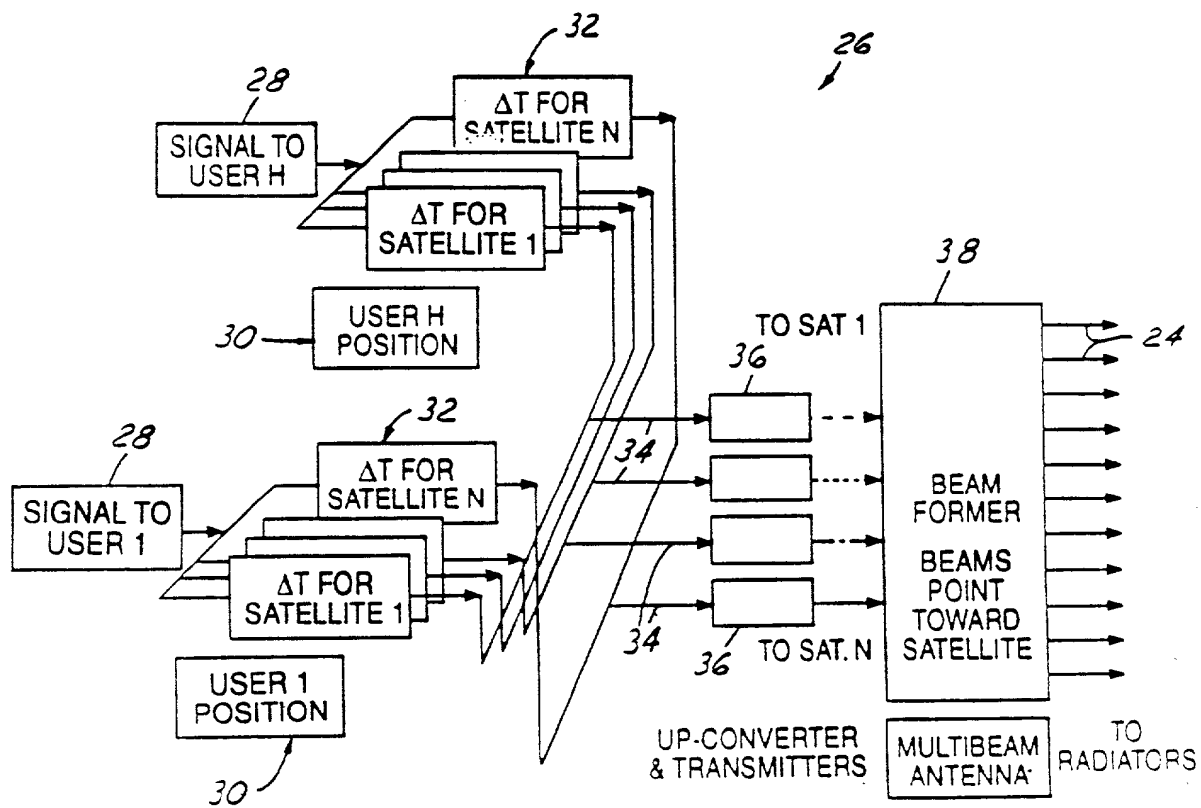


FIG. 2

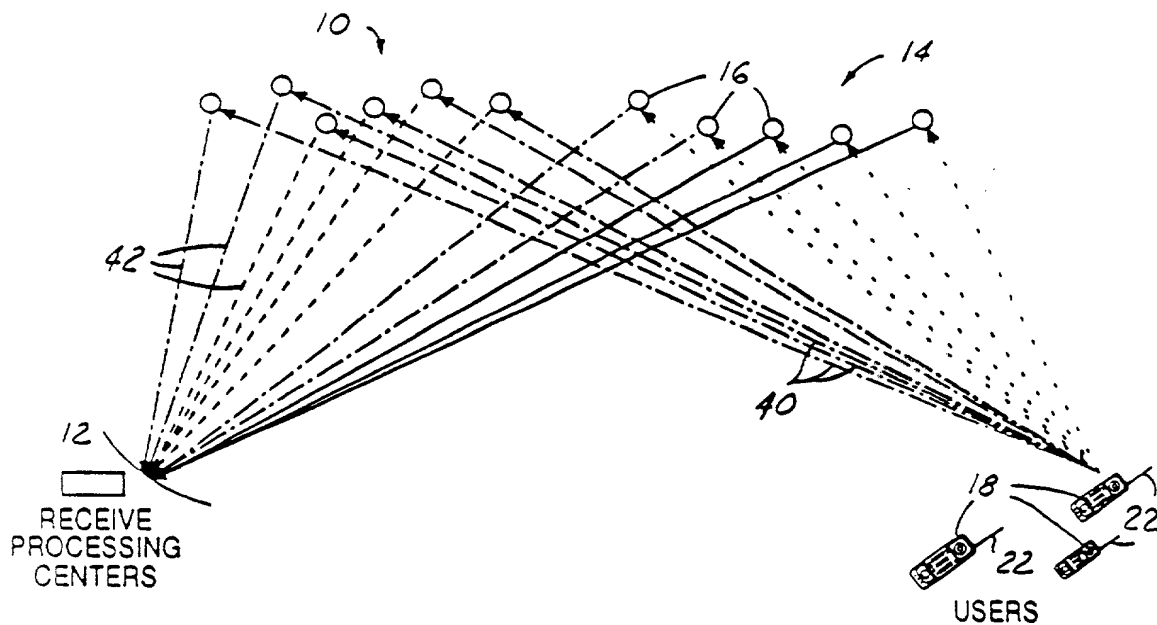


FIG. 3

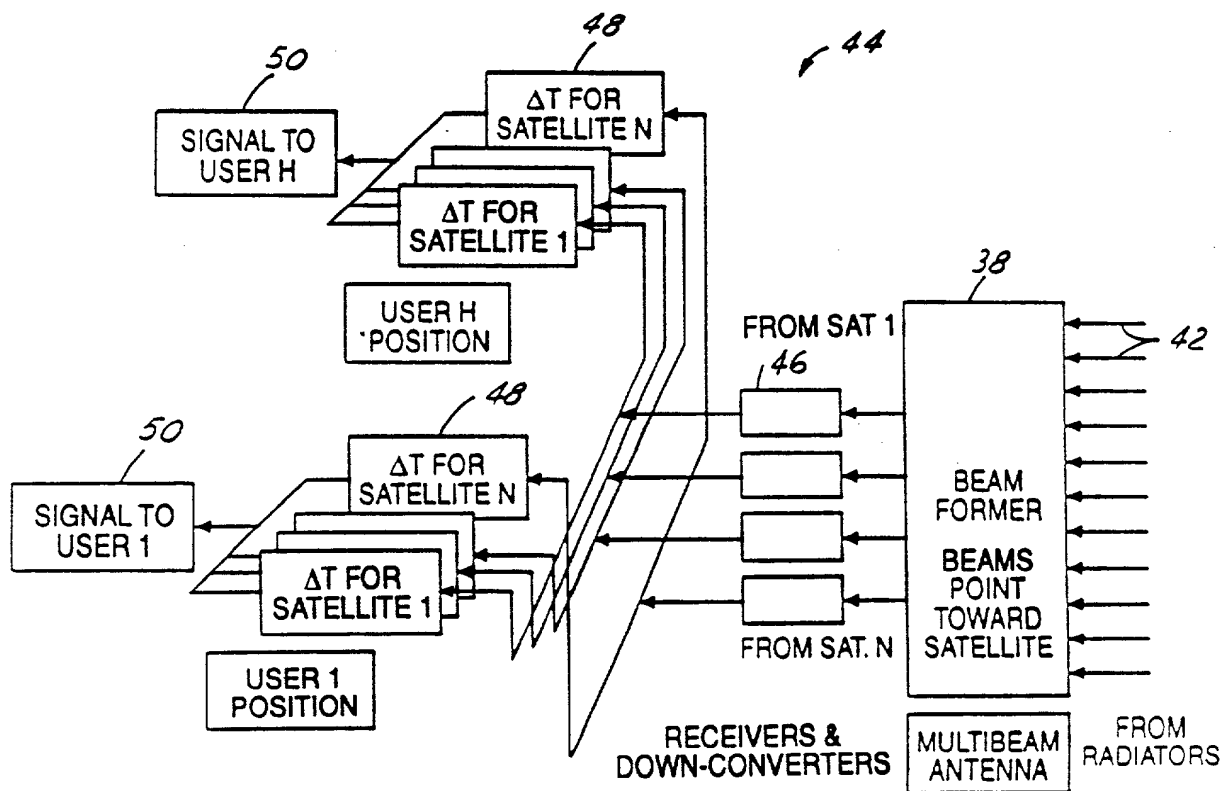


FIG. 4

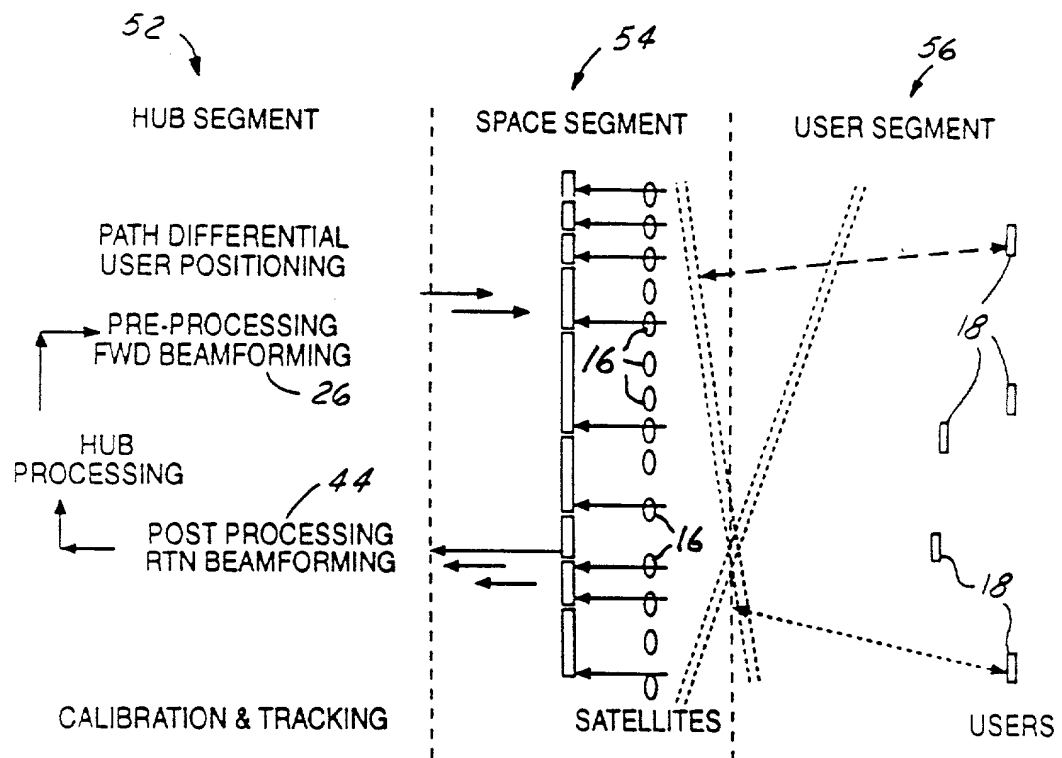


FIG. 5

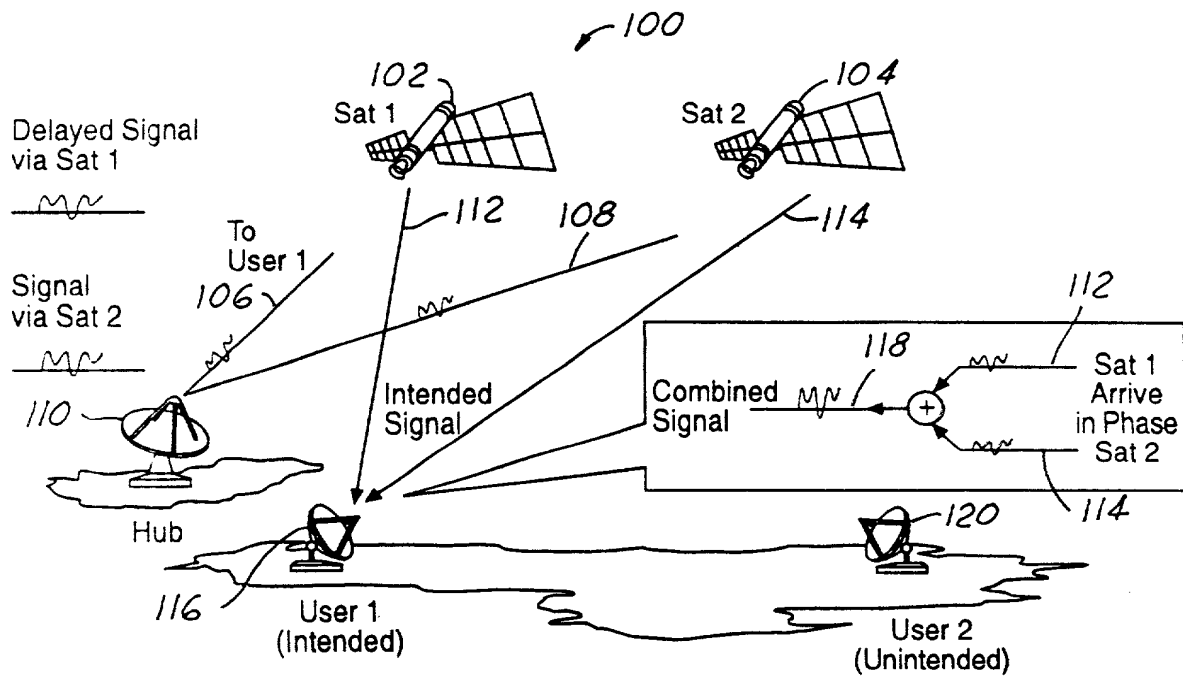


FIG. 6

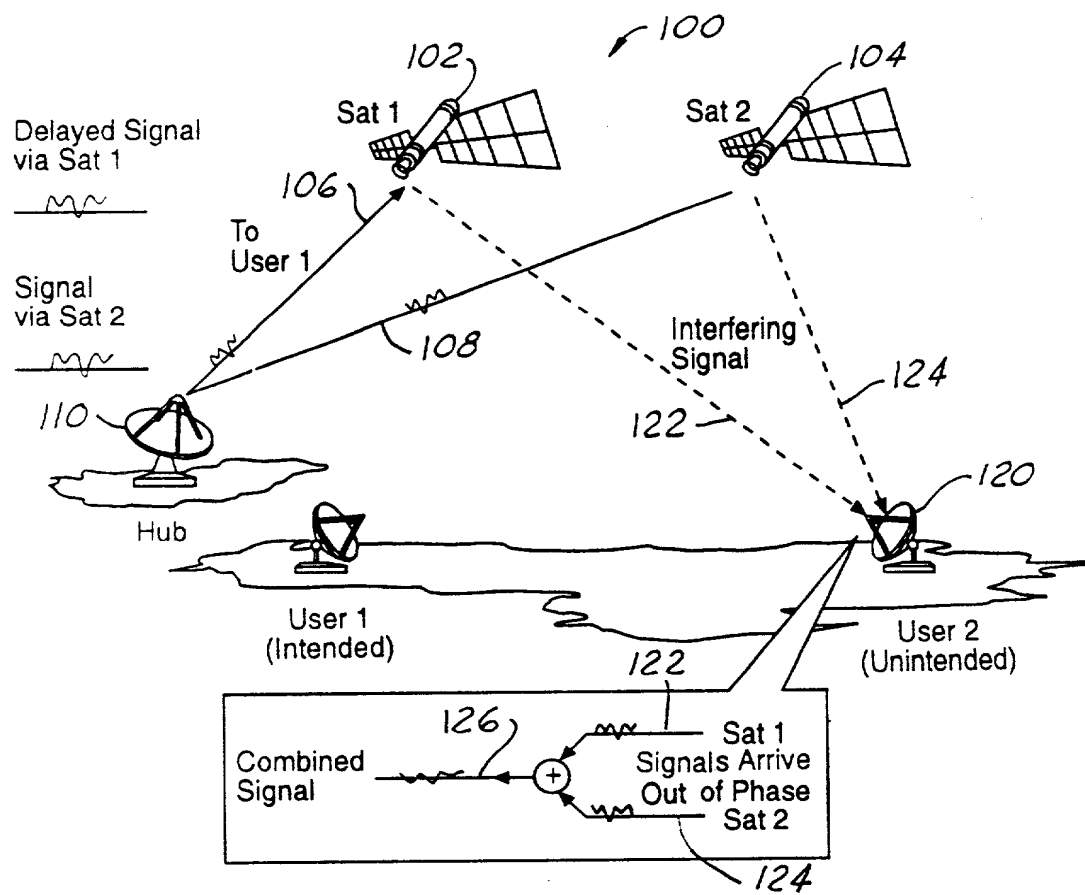
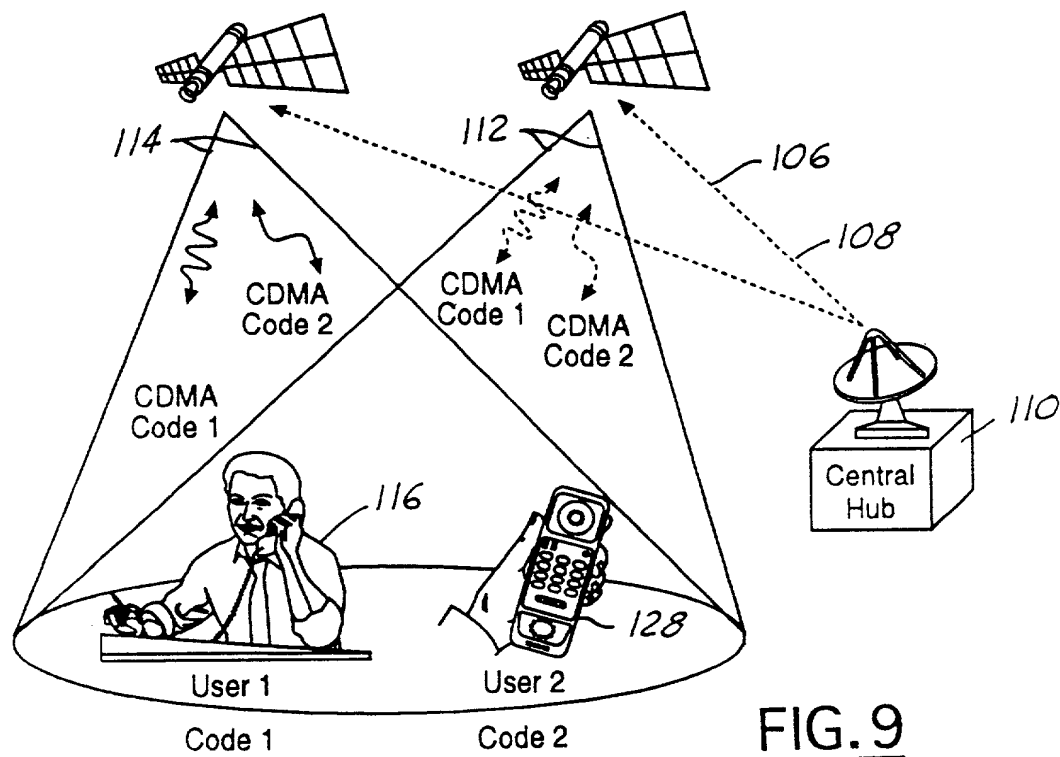
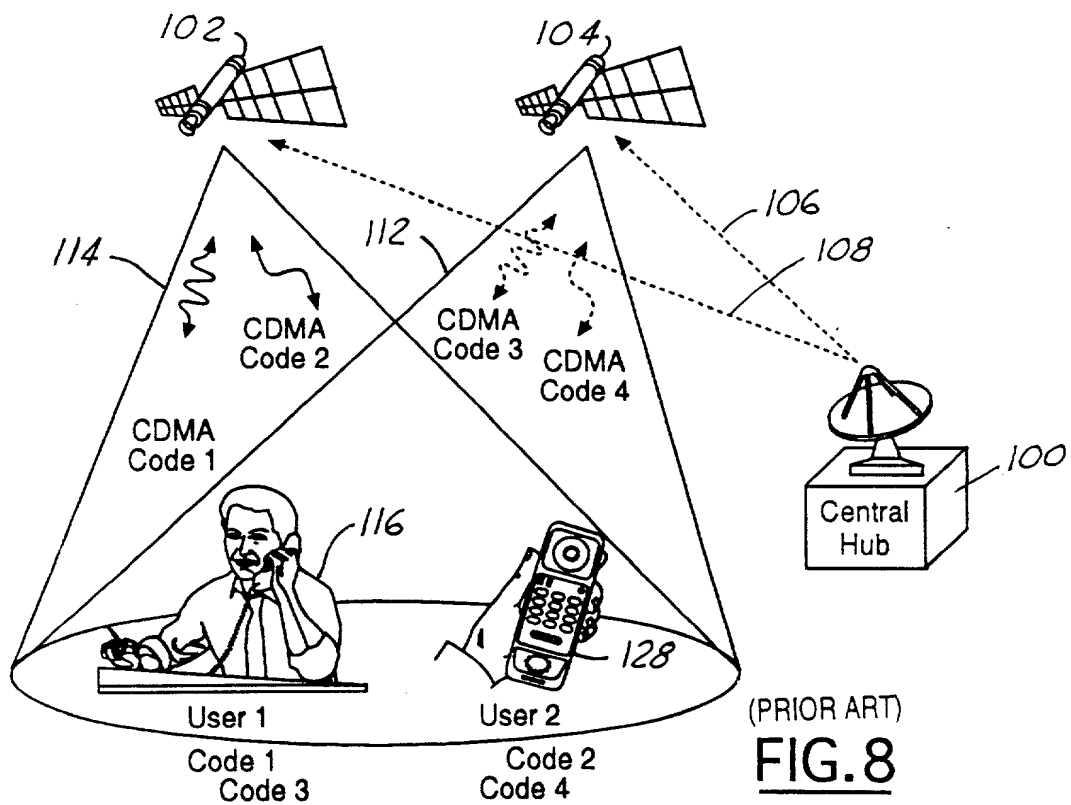


FIG. 7



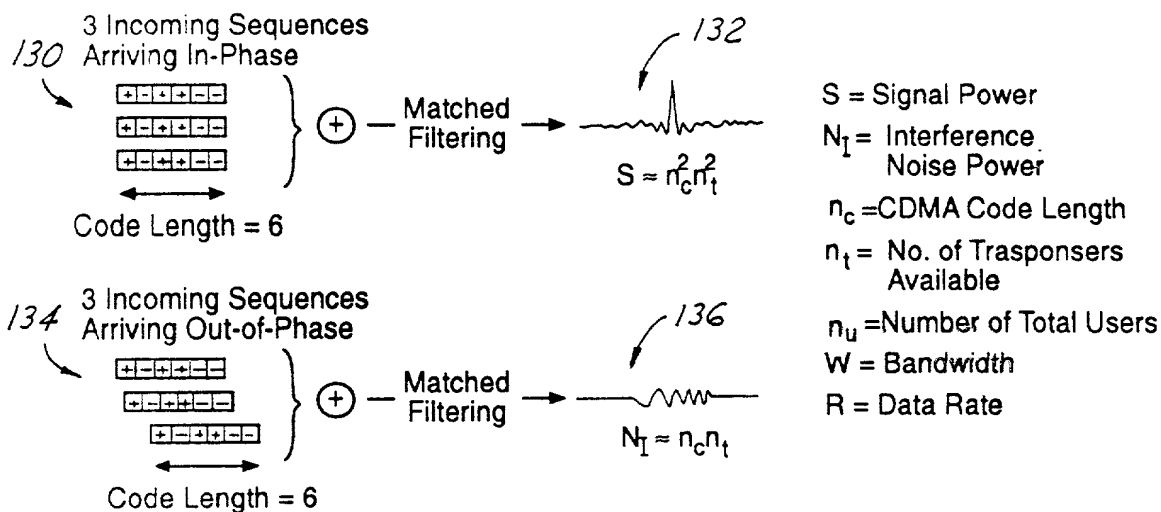


FIG. 10

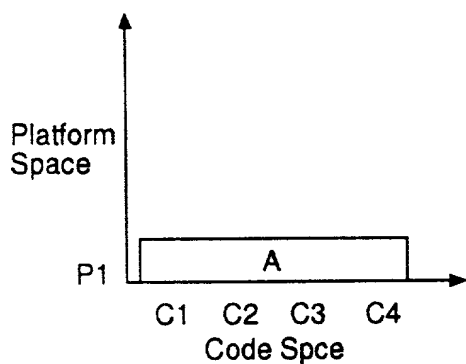


FIG. 11

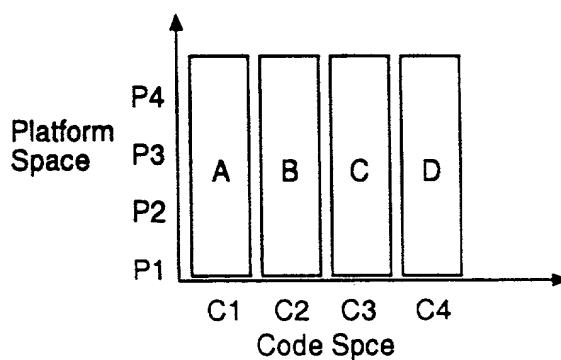


FIG. 12

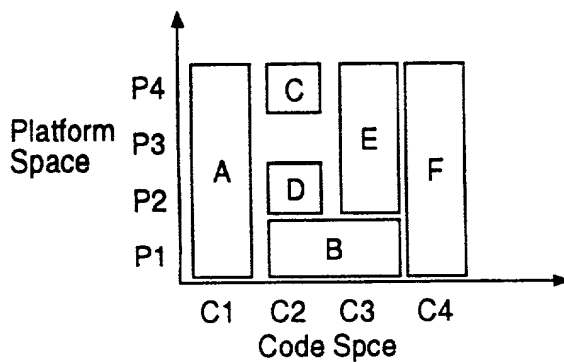


FIG. 13

COMBINED DECLARATION FOR PATENT APPLICATION AND POWER OF ATTORNEY

Page 1 of 2
PD-200049

- ☒ Original
- ☐ Continuation
- ☐ Division
- ☐ Continuation-in-part
- ☐ Supplemental

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **A MULTI-PLATFORM WIRELESS COMMUNICATION SYSTEM FOR A VARIETY OF DIFFERENT USER TYPES**

the specification of which

- (check one) ☒ is attached hereto.
- ☐ was filed on _____ as Application Serial No. _____ and (a) [other than supplemental] was amended on or (b) [supplemental] with amendments through _____.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by an amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority Claimed
☐ Yes ☐ No

_____	_____	_____
Number	Country	Day/Month/Year Filed

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

_____	_____	_____
Application Serial No.	Filing Date	Status (patented, pending, abandoned)




I hereby appoint the following attorneys, or agent and attorneys, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Bradley K. Lotrz,	Registration No. 45,472,
Vijayalakshmi D. Duraiswamy,	Registration No. 31,505,
Michael W. Sales,	Registration No. 30,213.

Address all telephone calls to , Michael W. Sales, (310) 66209916

Address all correspondence to **Customer Number 020991 (Hughes Electronics Corporation, Patent Docket Administration, Bldg. 001, M/S A109, PO Box 956, El Segundo, California 90245-0956).**

I hereby declare that all statement made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such false statements may jeopardize the validity of the application or any patent issued thereon.

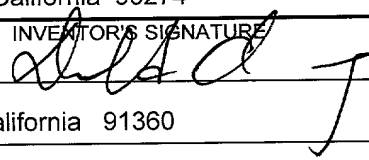FULL NAME OF SOLE OR JOINT INVENTOR KAR W. YUNG	INVENTOR'S SIGNATURE 	DATE 5/22/00
RESIDENCE (CITY AND STATE) 4738 Narrot Street, Torrance, California 90503		CITIZENSHIP U.S.A.
POST OFFICE ADDRESS 4378 Narrot Street, Torrance, California 90503		
FULL NAME OF SOLE OR JOINT INVENTOR FRANK A. HAGEN	INVENTOR'S SIGNATURE 	DATE 5/17/00
RESIDENCE (CITY AND STATE) 2309 Via Rivera, Palos Verdes Estates, California 90274		CITIZENSHIP U.S.A.
POST OFFICE ADDRESS 2309 Via Rivera, Palos Verdes Estates, California 90274		
FULL NAME OF SOLE OR JOINT INVENTOR DONALD C. D. CHANG	INVENTOR'S SIGNATURE 	DATE 5/18/00
RESIDENCE (CITY AND STATE) 2350 Moberly Court, Thousand Oaks, California 91360		CITIZENSHIP U.S.A.
POST OFFICE ADDRESS 2350 Moberly Court, Thousand Oaks, California 91360		
FULL NAME OF SOLE OR JOINT INVENTOR	INVENTOR'S SIGNATURE	DATE
RESIDENCE (CITY AND STATE)		CITIZENSHIP
POST OFFICE ADDRESS		
FULL NAME OF SOLE OR JOINT INVENTOR	INVENTOR'S SIGNATURE	DATE
RESIDENCE (CITY AND STATE)		CITIZENSHIP
POST OFFICE ADDRESS		